

# RECREATION

gerflorusa.com  
gerflorcanada.com



**Gerflor**<sup>®</sup>  
theflooringgroup



# NO SLIPS SKIDS BURNS

SAFE ENVIRONMENTS FOR SAFE PLAY



Cushion back  
for reduced shock  
upon impact.

No rug or  
skin burns  
for safe play.

Allergen free.  
Low VOC.  
No solvent.



MULTI

COLOR  
COMFORT  
PURPOSE



QUALITY  
SERVICE  
STOCK **GUARANTEED**





## RECREATION

A VERSATILE AND DURABLE  
FLOORING SOLUTION  
FOR MULTI-PURPOSE SPACES

Backed by  
Taraflex® experience  
since 1947.


10-year limited  
warranty.  
Personalized service.

**NO WAX** WASH IT.  
**FOR LIFE** RINSE IT.  
DONE.



## ASTM F2772

Kids will be kids. Unlike VCT and carpet, Recreation by Taraflex® meets the American Indoor Sports Flooring Safety Standard, preventing unnecessary impact injury and lessening your liability.



## COMFORT BACKING

Recreation has cushion backing technology to reduce the risk of immediate injury.



## NO BURNS

Recreation has a burn-free surface, which means no more rug burns.



## FLOORSCORE CERTIFIED

Breathe easy on Recreation flooring, as it's Floorscore Certified, allergen free, and antimicrobial.



## 17dB-19dB NOISE REDUCTION

Noise management control and comfort underfoot for teachers standing long hours.



## DURABILITY & VERSATILITY

Recreation's stain resistance and thick wearlayer make it ideal for flexible temporary spaces, such as lunch rooms, recess rooms, and study halls.



## LOW COST, LOW MAINTENANCE

PURProtect surface treatment means no wax, no buff for life, low maintenance, and low cost of total ownership.



## STOCKING PROGRAM

Best-selling wood designs and our most-popular colors are always in stock.



## BACKED BY TARAFLEX® EXPERIENCE SINCE 1947




**6050 Dark Tweed** | REC 30



**2707 Storm** | REC 30




**6061 Light Tweed** | REC 30

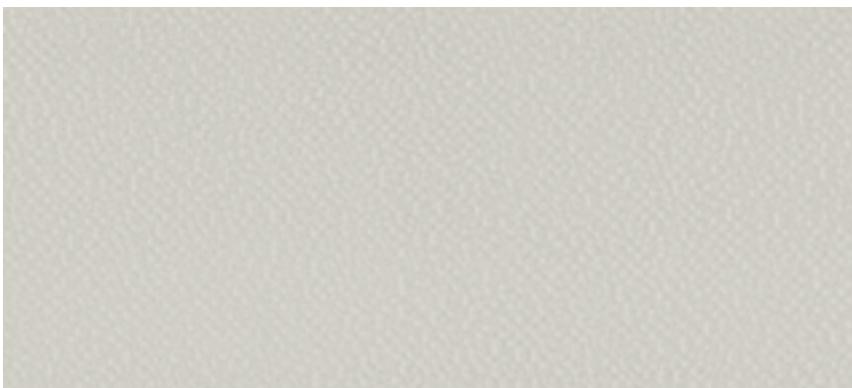

**6790 Fog** | REC 30



**2407 Sky Blue** | REC 30

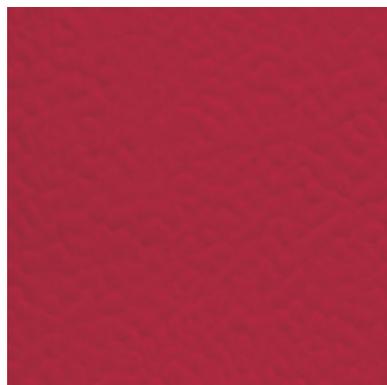


**6252 Red Pepper** | REC 30



**6570 Mint Green** | REC 30

# RECREATION FOR SAFE PLAY AND MULTI-PURPOSE FLOORING SOLUTIONS

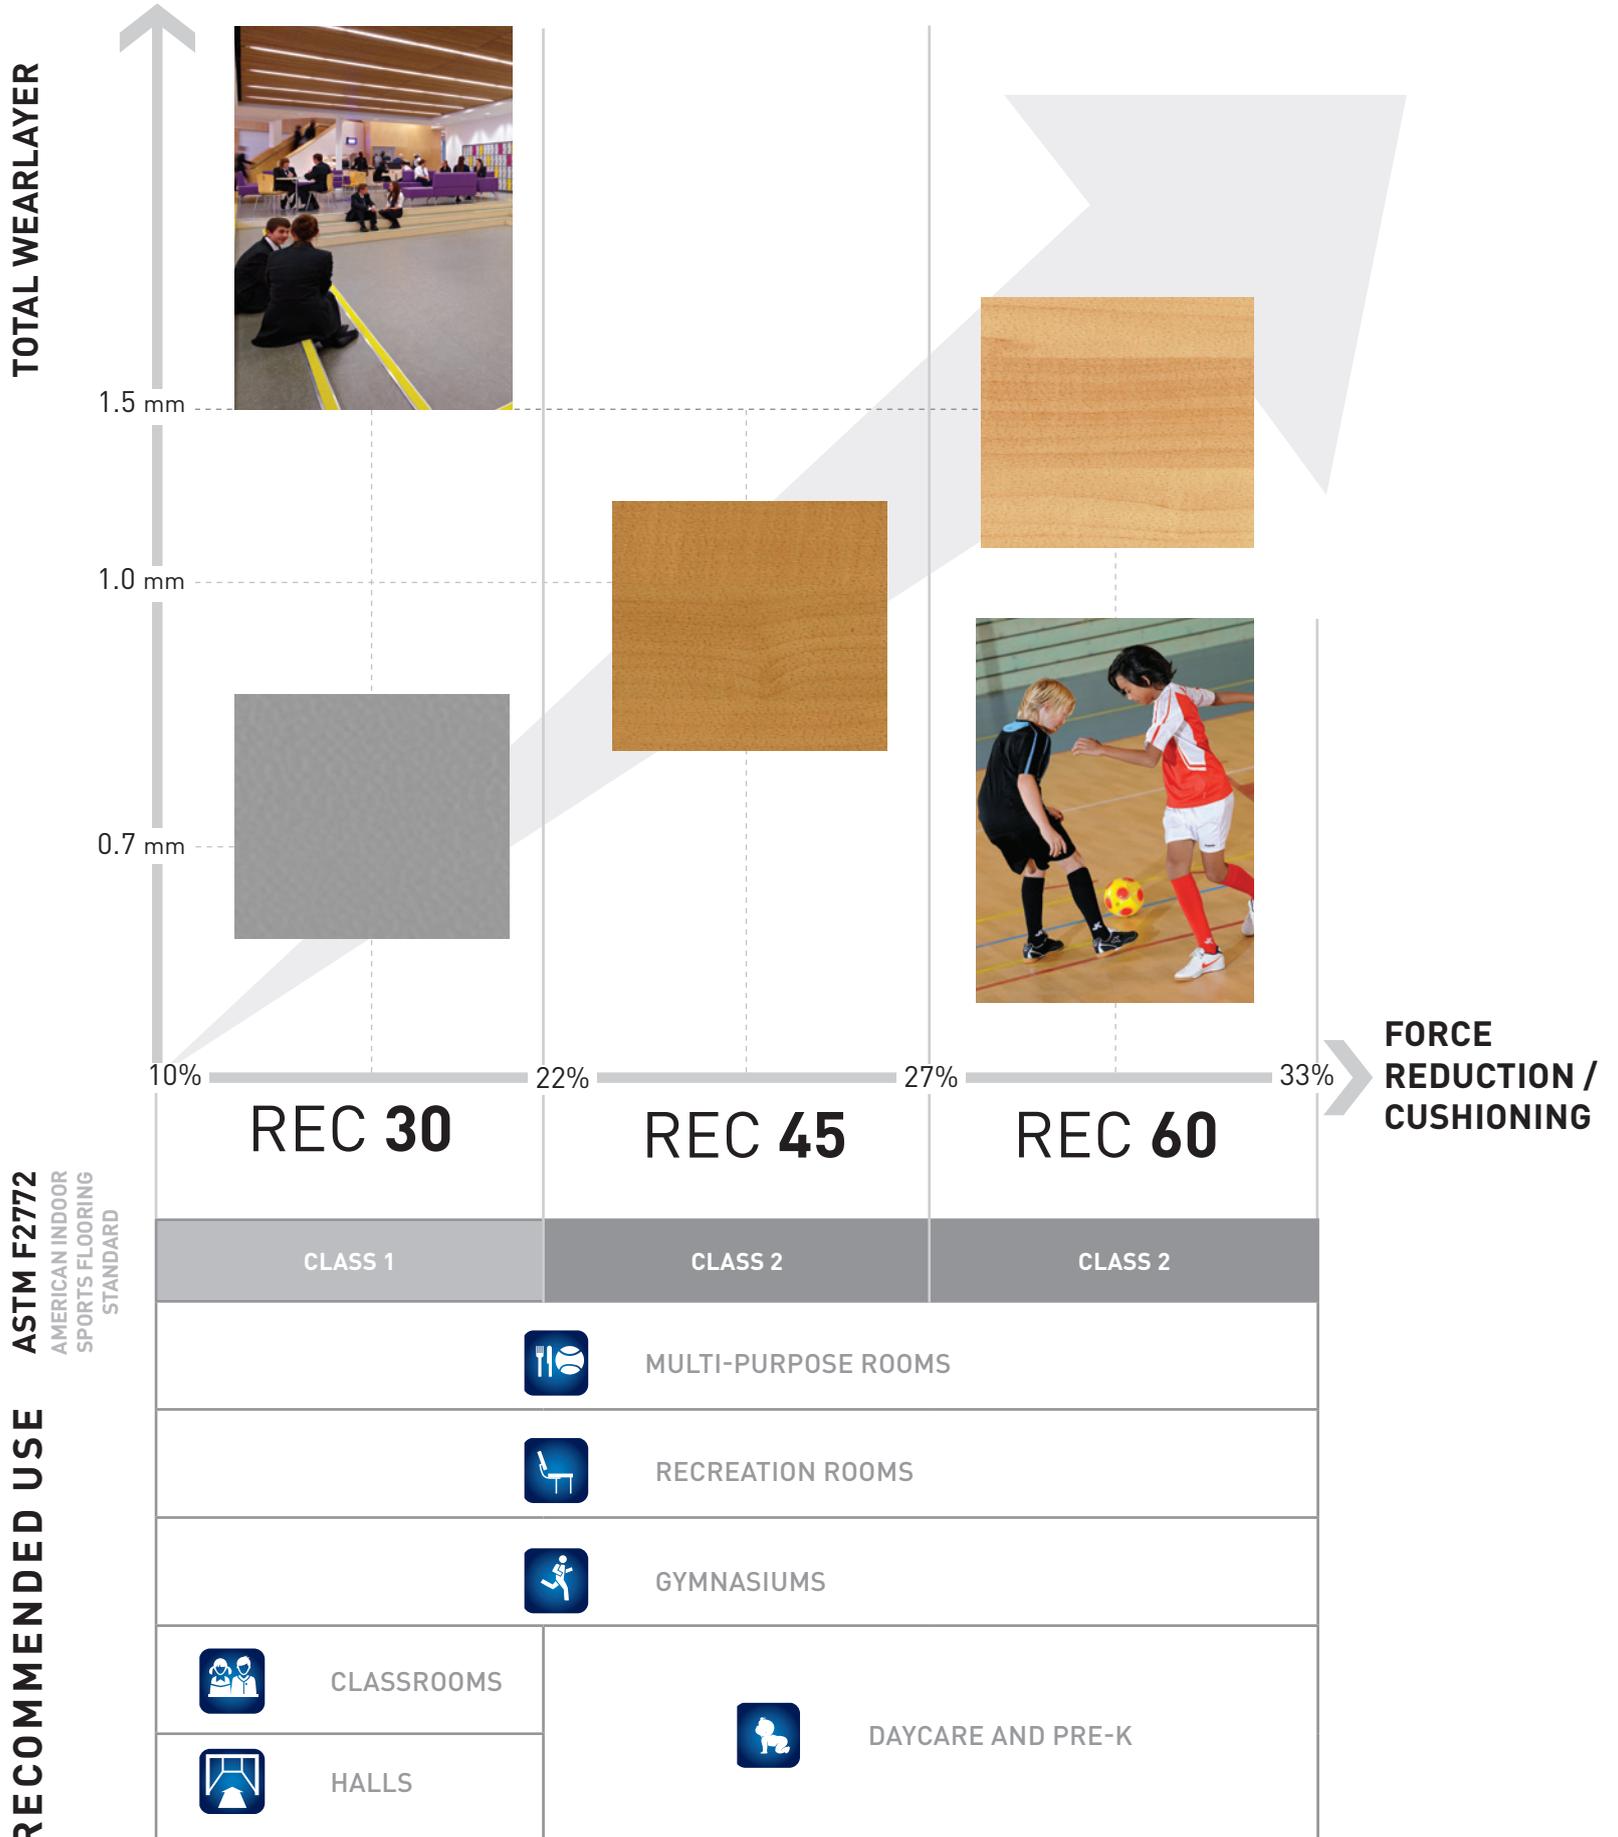

# REC 60 & REC 45



## SAFE PLAY WITH RECREATION FLOORING

- Provides cushion and safety for children and teens from recess to sports activities
- Meets ASTM F2772 for safe sports and play
- Wood designs are available in 86' 6" long rolls and are designed for standard gymnasium court sizes, which means less seams and better looking floors
- Thick vinyl wearlayer minimizes indentation from temporary furniture, like tables and chairs
- PURProtect surface treatment for no wax, easy maintenance, and enhanced stain resistance
- An ideal solution for multi-purpose use: rec rooms, recess rooms, and flexible spaces like cafeterias and gymnasiums
- Made with up to 36% pre-consumer recycled content



**6062 Canadian Maple** | REC 60 & REC 45



**6614 Oceano** | REC 60



**6058 American Oak** | REC 60 & REC 45



**2711 Gris** | REC 60 & REC 45



**2402 Azul** | REC 60 & REC 45



**6160 Naranja** | REC 60 & REC 45



**6563 Menta** | REC 60 & REC 45





**6154 Roja** | REC 60 & REC 45

# REC 60



**MORE CUSHIONING, GREAT DURABILITY**

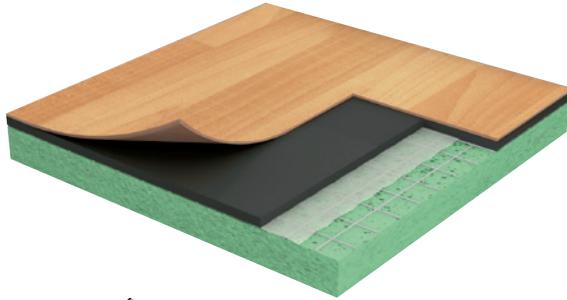



- REC 60 offers more cushioning as well as a thicker wearlayer, making it the best option of the Recreation range for sports activities combined with some multi-purpose activities
- 0.23" (6 mm) cushion back flooring technology
- 0.06" (1.5 mm) thick vinyl wearlayer
- Comfort/Force Reduction :  $\geq 27\%$  -  $\leq 33\%$ ; meets ASTM F2772 Class 2



# REC 45



**IDEAL FOR EVERYDAY PLAY**

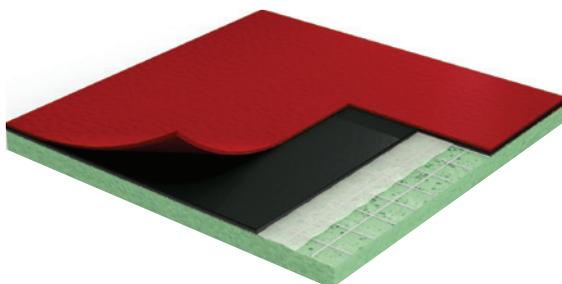

- Recommended for light recreation activities and multipurpose use
- 0.17" (4.5 mm) thick
- 0.4" (1 mm) thick vinyl wearlayer
- Comfort / shock absorption  $\geq 22\%$  -  $\leq 27\%$

# REC 30



PUR<sup>Protect</sup>

100% recyclable

## THE COMFORT-BACKED, NO WAX ALTERNATIVE TO VCT



- Commercial grade sheet flooring
- 0.13" (3 mm) thick with 0.03" (0.7 mm) pure vinyl wearlayer
- Noise control management up to 17 dB
- PURProtect surface treatment for ease of maintenance and reduced maintenance cost
- No wax, no buff for life
- Meets ASTM F 2772 Class 1 for indoor sports properties
- Ideal for cafeterias, break rooms, recess rooms, classrooms, hallways, gymnasiums, and more




6047 Classic Wood | REC 30



6045 Golden Wood | REC 30



6046 Brown Wood | REC 30



GERFLOR USA  
877.437.3567  
info@gerflorusa.com



GERFLOR CANADA  
438.333.0752  
gerflorcanada@gerflor.com

gerflorusa.com  
gerflorcanada.com

| DESCRIPTION                                 | STANDARDS  | REQUIREMENTS      | RECREATION 30                                       |   | RECREATION 45                                       |                 | RECREATION 60                                       |                 |
|---|--|-------------------|---|---|---|-----------------|---|-----------------|
| PRODUCT DESCRIPTION                         |  |                   | WOOD & TEXTILE DESIGNS                              | SOLID COLOR   | WOOD DESIGN   | SOLID COLOR     | WOOD DESIGN   | SOLID COLOR     |
| Reference Specification                     | ASTM F1303   | -                 | Type 1, Grade 1                                     |   |   |                 |   |                 |
| Surface Treatment                           | -  | -                 | PURProtect UV Factory Applied                       |   |   |                 |   |                 |
| Foam  | ASTM F1303   | -                 | Class C: Cushion Foam Backing                       |   |   |                 |   |                 |
| Total Thickness                             | ASTM F386  | -                 | 0.13" (3.2 mm)                                      | 0.12" (3 mm)  | 0.18" (4.5 mm)                                      |                 | 0.24" (6.0 mm)                                      |                 |
| Total Wearlayer                             | ASTM F410  | -                 | 0.03" (0.7 mm)                                      |   | 0.04" (1 mm)  |                 | 0.06" (1.5 mm)                                      |                 |
| Roll Width                                  | -  | -                 | 6' 6" (2 m)   | 6' 6" (2 m)   | 4' 11" (1.5 m)                                      |                 | 4' 11" (1.5 m)                                      |                 |
| Roll Length                                 | -  | -                 | 82' (25 m)  | 82' (25 m)  | 86' 6" (26.4 m)                                     | 67' 3" (20.5 m) | 86' 6" (26.4 m)                                     | 67' 3" (20.5 m) |
| Weight                                      | -  | -                 | 0.59 lb/ft <sup>2</sup><br>(2.9 kg/m <sup>2</sup> ) | 0.47 lb/ft <sup>2</sup><br>(2.3 kg/m <sup>2</sup> ) | 0.53 lb/ft <sup>2</sup><br>(2.6 kg/m <sup>2</sup> ) |                 | 0.76 lb/ft <sup>2</sup><br>(3.7 kg/m <sup>2</sup> ) |                 |
| TECHNICAL CHARACTERISTICS                   |  |                   |   |   |   |                 |   |                 |
| Sport Properties                            | ASTM F2772   | Class 1           | Class 1   |   | Class 2   |                 | Class 2   |                 |
| Force Reduction / Cushioning                | ASTM F2569   | ≥ 10%             | ≥ 10% - ≤ 22%                                       |   | ≥ 22% - ≤ 27%                                       |                 | ≥ 27% - ≤ 33%                                       |                 |
| Static Load (175 psi)                       | ASTM F970  | ≤ 0.005           | ≤ 0.002"  |   | ≤ 0.003"  |                 | ≤ 0.004"  |                 |
| Static Load (250 psi)                       | ASTM F970  | -                 | ≤ 0.003"  |   | ≤ 0.006"  |                 | ≤ 0.006"  |                 |
| Impact Sound Insulation                     | EN ISO 171-2   | -                 | 18 dB   | 17 dB   | 17 dB   |                 | 19 dB   |                 |
| Fire Rating                                 | ASTM E648  | Class 1           | Class 1   |   |   |                 |   |                 |
| SUSTAINABILITY HEALTH & SAFETY              |  |                   |   |   |   |                 |   |                 |
| Antimicrobial Treatment                     | -  | -                 | Sanosol <sup>HYGIENE</sup>                          |   |   |                 |   |                 |
| Allergen Free                               | -  | -                 | OK  |   |   |                 |   |                 |
| Indoor Air Quality / Low Emitting Materials | EQc2<br>LEED v4  | -                 | Floorscore™   |   |   |                 |   |                 |
| TVOC After 28 Days                          | ISO 16000-6  | -                 | <100 µg/m <sup>3</sup>                              |   |   |                 |   |                 |
| Ease of Maintenance                         | -  | -                 | No Wax, No Buff for Life / PURProtect               |   |   |                 |   |                 |
| Plant Certifications                        | -  | -                 | ISO 14001 and ISO 9001                              |   |   |                 |   |                 |
| Restriction Use of Harmful Chemicals        | M Rc4<br>LEEDv4  | -                 | Complies with REACH                                 |   |   |                 |   |                 |
| Production Waste                            | -  | -                 | 100% Manufacturing Waste Recycled                   |   |   |                 |   |                 |
| Recycled Content                            | M Rc3<br>LEED v4   | -                 | 12%   |   | 29%   |                 | 36%   |                 |
| End of Life                                 | -  | -                 | 100% Recyclable                                     |   |   |                 |   |                 |
| INSTALLATION METHOD                         |  |                   |   |   |   |                 |   |                 |
| Full-Spread Adhesive                        | ASTM F2170<br>(F1869)  | ≤ 80% RH (≤ 5lb)  | <i>www</i>  |   |   |                 |   |                 |
| Moisture Mitigation System                  |  | ≤ 92% RH (≤ 10lb) | ISOLSPORT   |   |   |                 |   |                 |
| WARRANTY                                    | 10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions. |                   |   |   |   |                 |   |                 |



**Gerflor**  
theflooringroup

Committed to Sustainable Development

Made in USA. January 2014. I Imagine.