



# EXTREME

Property	Standard	Unit	Result
----------	----------	------	--------

## DESCRIPTION

Surface	X PUR scuff-resistant surface		
Backing	Combined closed cell foam system		
Thickness	EN ISO 24346	mm	8.0
Top layer	EN ISO 24340	mm	1.20
Weight	EN ISO 23997	g/m <sup>2</sup>	4250
Width	EN ISO 24341	m	2
Standard roll length	EN ISO 24341	m	15 ± 10%

## CLASSIFICATION

Product specification	Vinyl indoor sports floor EN 14904 (category P2)		
Impact sound insulation	EN ISO717-2	dB	22
Thermal resistance	-	m <sup>2</sup> K/W	0.08
Reaction to fire	EN 13501	-	C <sub>fl</sub> -s1


## SPORT PROPERTIES

Friction	EN 13036-4	-	80-110
Shock absorption	EN 14808	%	≥ 35 ( P2)
Vertical deformation	EN 14809	mm	1.9
Ball rebound	EN 12235	%	98
Specular gloss	EN 2813	%	< 30

## TECHNICAL CHARACTERISTICS

Dimensional stability	EN ISO 23999	%	± 0,2
Indentation resistance	EN 1516	mm	<0,5
Resistance to rolling load	EN 1569	N	1500
Colour fastness	ISO 105 B02	-	6
Chemical resistance	EN ISO 26987	-	no change
Abrasion resistance	EN ISO 5470-1	mg/1000cycles	< 250

## OTHERS

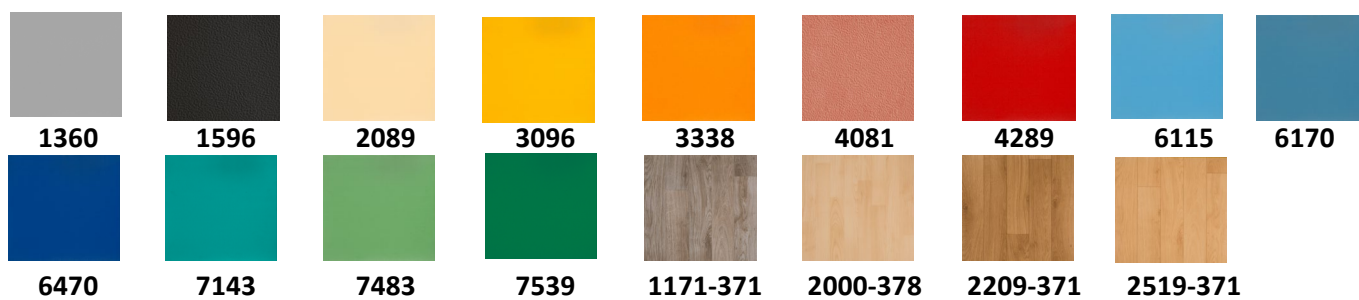

Limited warranty Cleanability

Antimicrobial treatment Environmental attributes

No periodic renewal needed; Solvent and heavy metal free

**GRABOPLAST Floor Covering Manufacturers Ltd.**  
 H-9023 Győr, Fehérvári út 16/b tel.: (36) 96 506 100  
 mail@graboplast.hu www.graboplast.hu